



APPLEGATE MULCH
 1000 HIGHVIEW DRIVE
 WEBBERVILLE MI 48892
 HEADQUARTERS: 517-521-3545
 FAX: 517-521-3597
800-627-7536 TOLL FREE
 AskUs@ApplegateMulch.com

Worldwide Supplier

Mechanical Fibers

Bond Strengthening/Binding Fibers



PRODUCT OVERVIEW:

Applegate Fiber, is specially coated to improve the bonding strength of Applegate hydro-seeding mulches.


Applegate Fiber, improves the performance of hydro-seeding mulches by providing a mechanical adhesion of fibers resulting from the fibers long length. This reduces the need for chemical tackifiers, and extends the longevity of fiber mulch hydration.

RECOMMENDED APPLICATION RATES:

- 20 lbs per acre when used without a chemical tackifier
- 10 lbs per acre when used with a chemical tackifier

SPECIFICATIONS:

- Applegate Fibers are manufactured from 100% virgin Polyester and has the following physical characteristics:
- Cut Length: 6mm, 12mm, 19mm, 25mm
- Denier: 6 (5-7)
- Color: White
- Fibers per lb. (at ¾"): 30 million
- Bulk Density: 25-28 lbs./cubic foot (approximate)
- Melting Point, C: 46
- Tensile Strength: 75-79 psi
- Elongation: 12% avg.
- Specific Gravity: 1.38
- Heat Conductivity: Low
- Electrical Conductivity: Low
- Water Absorption: 0.2%

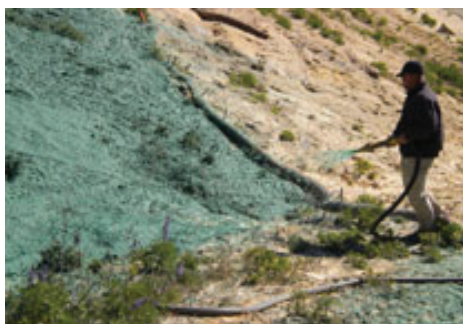

FEATURES & ADVANTAGES:

- Improves the bonding strength of hydromulches
- Mechanically binds fibers to fibers and fibers to soil particles
- Reduces the need for chemical tackifiers

APPEARANCE:

- White Coarse Powder & Fiber Mix.

PACKAGING:

- Available in 50 lb cases of 10 x 5lbs. bags



Manufacturer of the finest hydroseeding products.
 Applegate's most appreciated benefit:

We listen, teach, serve, and stand behind you 100%.

Let us prove it. Call us with any concern.

1.800.627.7536

We've always been green.
 Sustainable & earth-friendly since 1980



PLANTS IN: MICHIGAN ~ WISCONSIN ~ KENTUCKY ~ COLORADO ~ GEORGIA ~ PENNSYLVANIA ~ LOUISIANA
Then God said, "Let the land burst forth with every sort of grass"...and so it was...and God saw that it was good. - Genesis 1:11-12